



H3-3 OUTDOOR CABINET G2

FOR UP TO 3 MODULES (15kW)



Cabinet

- Low noise and no harmfull emission
- Compact and light footprint
- Easy and fast installation
- Flexible installation in- and outdoor
- Reduction of CO² footprint
- Elimination of fuel and equipment theft









CLEAN ENERGY

SUSTAINABILITY

PROFITABILITY

SIMPLICITY

RELIABILITY

KNOW-HOW

Clean, simple and sustainable power

Flexible installation of our H3 5000 is critical for customer satisfaction. Our fuel cell cabinets combine the H3 5000 with fuel tank, power distribution and wireless communication for remote monitoring, making it a complete, independent power solution. We offer several outdoor, indoor and deployable solutions which can cover any installation needs.

The system is ideal for critical backup power, temporary or continuous 24/7. This means that the system can work in off-grid applications as well as backup power in grid applications. The outdoor cabinet system includes a 200 I fuel tank, and optionally larger outdoor fuel tanks can be offered for less frequent refueling.

Outdoor Cabinet G2 has a high safety level, Improved remote monitoring, new feature cabinet datalogging, easy installation and is convertible to indoor use.





H3-3 OUTDOOR CABINET G2

PERFORMANCE						
H3 5000 modules		2	3			
Power output, electrical [kW]	5	10	15			
IP rating	IP 54	IP 54	IP 54			

Power output, electrical [kW]	5	10	15	Weight empty [kg]	360	360	36
IP rating	IP 54	IP 54	IP 54	Weight fuel cell modules [kg]	65	130	195
				Size [mm]	900(W	') x 1200(D) x 1	970(H)

OPERATIONS				
Voltage output [Vdc]	42 - 57			
Ambient temperature ¹ [°C]	-20°C and up to 50°C			
Communications	Build-in 3G / 4G modem			

^{1.} Options for lower temperatures


INTERNAL FUEL STORAGE				
Tank capacity [I] / [kg]	200 / 180			
Fuel energy capacity [kWhe]	235			

All numbers related to $\,kW$ or kWh is electrical power / Energy delivered at module terminals (kWe / kWhe)

Contact SerEnergy for other voltage variants.

DIMENSIONS & WEIGHT

TYPICAL SET-UP

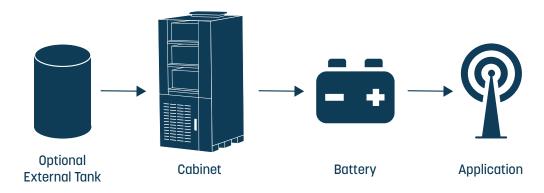

DIMENSIONS

